



DriPak®

*Extended Surface
Pocket Filters
Fiberglass Media*



- **Patented pocket design lengthens filter life**
- **Low resistance and high dust holding capacity**
- **Engineered for performance reliability**
- **Available in two efficiencies: 90-95% and 80-85%***

DriPak®

Designed for high performance in demanding operating conditions, the DriPak extended surface pocket filters are perfect as prefilters and final filters for particulate removal where clean air is required. DriPaks are an excellent choice for healthcare facilities, automotive paint booths, commercial buildings, and various industrial applications. Manufactured by AAF International, the original developers of the extended surface pocket filter, DriPak has set the industry standard for over 40 years.

IAQ ENGINEERED

DriPak is available in a wide range of sizes and two efficiencies – 90-95% and 80-85%. Micro-fine fiberglass fibers protected by a thin layer of scrim, offer low resistance at a high level of cleaning efficiency. Smaller sized fibers are used to produce high efficiency medias such as 90-95% and 80-85%.


DESIGNED FOR PERFORMANCE

DriPak employs a sturdy, leak-free pocket design to prevent collected particulate from escaping. The design includes span stitching covered with a thermoplastic sealant to hold the stitches in place and seal the needle holes. Interlocked support frames attached to the pockets prevent flexing and buckling during full inflation. The double U-shaped reinforced header forms a solid container for the pocket support frames.


To ensure quality performance, DriPak filters are tested in an AAF approved, state-of-the-art laboratory, governed by ISO-9001 procedures.

AERODYNAMICALLY BALANCED POCKETS

The DriPak pocket design has been aerodynamically balanced (U.S. Patent 4,356,011) to achieve optimum pocket configuration for minimum resistance and maximum dust holding capacity. This balancing significantly lengthens the life of the filter. Our contoured pockets allow full inflation without crowding or restriction of airflow.

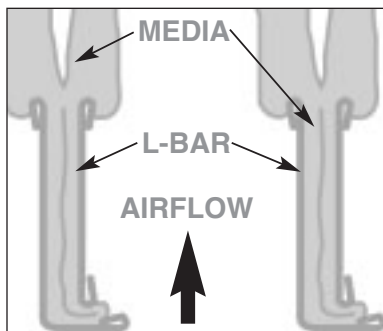

Leak-free Span Stitching

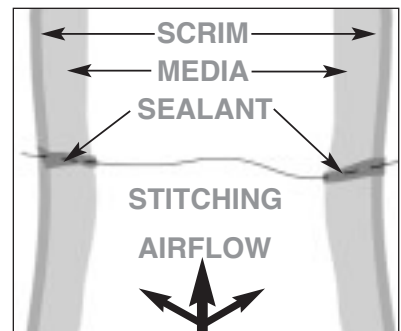

Interlocked Pocket Support Frames


* ASHRAE Test Standard 52.1






PERFORMANCE INFORMATION

Initial Resistance vs. Airflow

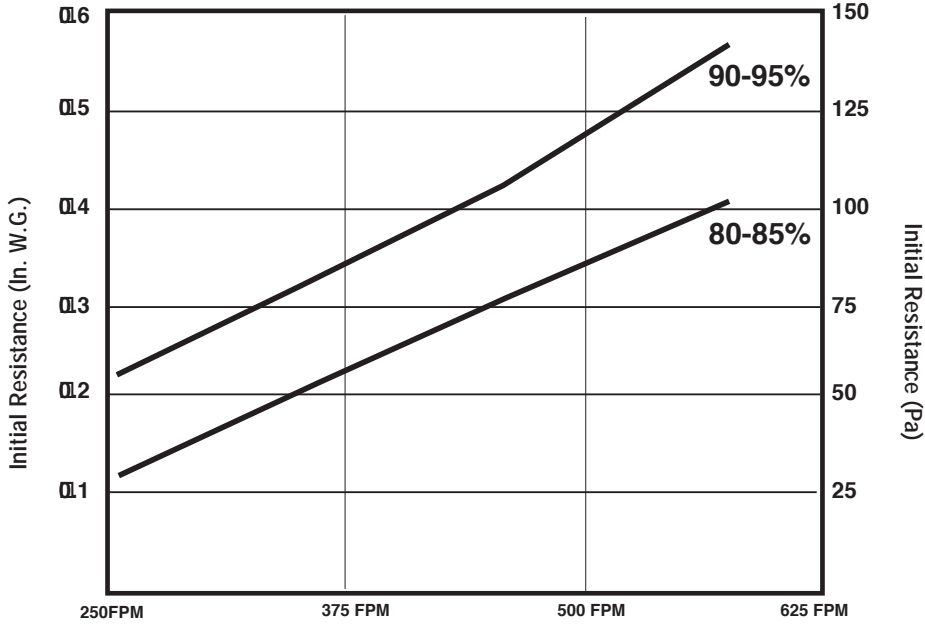

Airflow Velocity
Curves based on 24"x24"x30", 8 pocket filter.

Composite Minimum Efficiency Curve

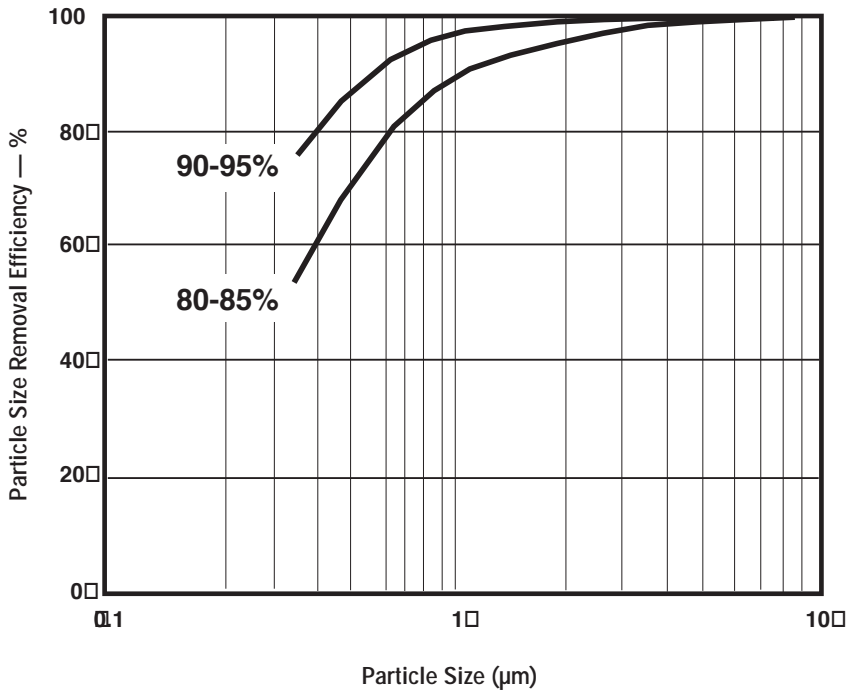

Particle Diameter (µm)
Tested in accordance with ASHRAE Test Standard 52.2.
This chart shows the minimum efficiency the filter will provide throughout its service life.



10300 ORMSBY PARK PL STE 600
LOUISVILLE KY 40223-6169
P O BOX 35690
LOUISVILLE KY 40232-5690
www.aafintl.com

For Additional Information On AAF Products,
Call The Answer Center
888.AAF.2003

