



*Better Air is Our Business®*

## AmericanAirFilter®

### BioCel® M-Pak

#### High Efficiency Extended Surface Air Filter

- 6"-depth filter with the same media area and performance as 12"-deep filters
- Space-saving design; reduces freight, storage, and handling costs
- Sturdy high-impact polystyrene cell sides enclose a fixed media pack
- Fully incinerable
- MERV 16

The BioCel M-Pak high-efficiency filter offers the same media area as the traditional BioCel 12"-deep filter in a 6"-deep design. This design delivers comparable efficiency, pressure drop, and overall performance in a much smaller package.

#### High Efficiency — Low Resistance

Rated 95% on 0.3  $\mu$ m particles and is a MERV 16 per ASHRAE Standard 52.2, BioCel M-Pak filters have the advantage of a much lower pressure drop than a typical HEPA filter (0.36" versus 1.0 in. w.g. at 250 FPM). BioCel M-Pak filters fill the gap between ASHRAE grade high efficiency filters and ultra-high efficiency HEPAs at a much lower weight and pressure drop.

This compact, lightweight filter will withstand operating temperatures to 176°F/80°C, if recommended final resistance is not exceeded.

To maximize service life, use BioCel M-Pak filters with high quality AAF prefilters.

#### Construction

The header and cell sides of the BioCel M-Pak filter are constructed of high-impact polystyrene. The design, which encloses a fixed media pack, creates a rugged filter that resists damage during shipping, handling, and operation. All components of the BioCel M-Pak are fully incinerable.



*BioCel® M-Pak filters meet efficiency requirements established for LEED® Project Certification.*

#### Applications

The BioCel M-Pak filter is designed primarily to remove airborne biological contaminants in hospital critical areas and food and pharmaceutical processing plants. It is engineered to meet the exacting requirements of precision manufacturing operations and laboratories, where very high efficiency filtration of fine particulate matter is necessary.


#### Cost-Saving Design

Due to the smaller footprint of the BioCel M-Pak filter, less space is required for storage. M-Pak filters are approximately 50% lighter than conventional 12"-deep filters that have metal cell sides. Easy handling means reduced maintenance costs and time savings. Disposal costs are also reduced, as two M-Pak filters can be disposed of in the space of one 12"-deep filter.

## BioCel® M-Pak


### Performance Data

**Composite Minimum Efficiency Curve**

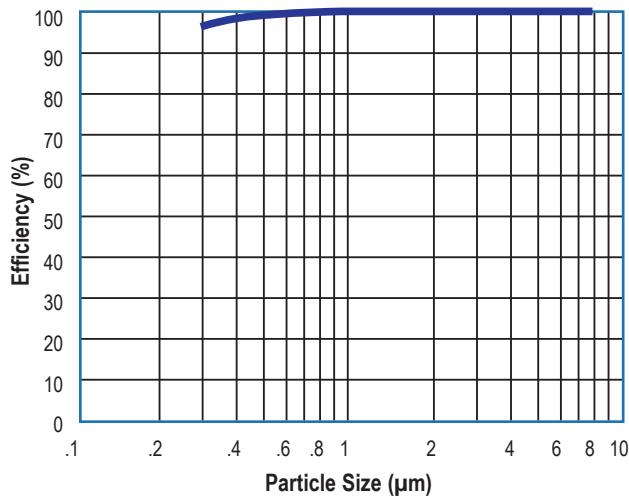

Tested in accordance with ASHRAE Standard 52.2.

**Initial Resistance vs. Filter Face Velocity**

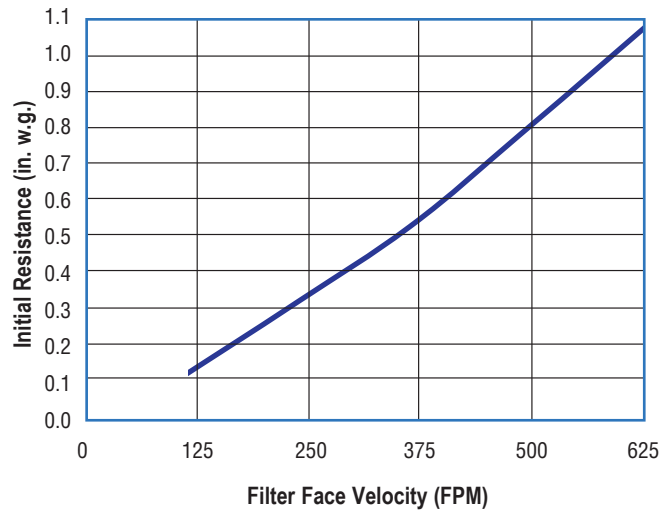

Filters are rated at 500 FPM filter face velocity. Recommended final resistance for all BioCel® M-Pak filters is 2" w.g.

### Specifications

**Max. Operating Temperature:** 176°F/80°C

**Media:** High-efficiency, moisture resistant glass fiber

**Cell Sides:** High-impact polystyrene (HIPS)

**Separators:** Hot-melt glue bead

**Gaskets:** Available on request

**Efficiency:** Rated 95% on 0.3µm particles and is a MERV 16 in accordance with ASHRAE Standard 52.2

### Metric Conversion Info

1.0 in. = 2.54 cm      1 CFM = 1.7 m<sup>3</sup>/hr  
 1 ft<sup>2</sup> = .09 m<sup>2</sup>      1.0 in. w.g. = 249 Pa  
 1 FPM = .005 m/sec.

### Underwriters Laboratories Classification

BioCel M-Pak filters are UL Classified. Testing was performed according to UL Standard 900 and ULC-S111.

AAF Green® is a registered trademark of AAF intranational in the U.S.



AAF International Building  
 9920 Corporate Campus Dr., Suite 2200  
 Louisville, Kentucky 40223-5000

Customer Service 888.223.2003  
 Fax 888.223.6500

www.aafintl.com



AAF has a policy of continuous product research and improvement and reserves the right to change design and specifications without notice.

ISO Certified Firm

©2013 AAF International  
 The USGBC Member logo and LEED® are trademarks owned by the U.S. Green Building Council and are used by permission.